

SMD FLAT WIRE COILS

- CDB SERIES -




FEATURES

- Large current adaptable
- Footprint compatible with most standard
- Lower temperature rise at large current
- Low profile, low DCR
- Available on tape and reel for auto surface mounting

APPLICATIONS

- Laptop / Desktop / Notebook Computers
- Terminals / Portable Servers / Workstation
- DC/DC Converter in Distributed Power Systems or VRM Applications
- Thin Type On-board Power Supply Module for Exchanger

CONSTRUCTION

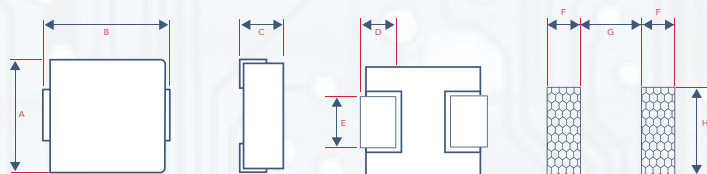

CHARACTERISTICS

- Saturation Rated Current would cause inductance to drop approximately 25% (0420 drop approximately 30%).
- Temperature Rise Current would cause an approximately ΔT of 40°C
- All test data is referred to 25°C ambient

DIMENSIONS

TYPE	A	B	C (MAX)	D	E	F	G	H
CDB0420	4.1±0.3	4.5±0.3	2.0	0.8±0.3	1.5±0.3	1.5	2.5	2.2
CDB0520	4.7±0.5	5.5±0.3	2.0	1.2±0.5	1.5±0.5	2.0	3.0	2.5
CDB0530	4.7±0.5	5.5±0.3	3.0	1.2±0.5	1.5±0.5	2.0	3.0	2.5
CDB0620	6.8 max	7.5 max	2.0	1.6±0.5	2.9±0.5	2.5	3.7	3.5
CDB0625	6.8 max	7.5 max	2.5	1.6±0.5	2.9±0.5	2.5	3.7	3.5
CDB0630	6.8 max	7.5 max	3.0	1.6±0.5	2.9±0.5	2.5	3.7	3.5
CDB0650	6.8 max	7.5 max	5.0	1.6±0.5	2.9±0.5	2.5	3.7	3.5
CDB1040	10.3 max	11.5 max	4.0	2.2±0.3	2.9±0.5	3.5	6.0	4.0
CDB1340	12.9 max	13.8 max	3.7	2.3±0.5	3.6±0.5	2.9	7.9	5.0
CDB1350	12.9 max	13.8 max	5.0	2.3±0.5	3.6±0.5	2.9	7.9	5.0
CDB1365	12.9 max	13.8 max	6.5	2.3±0.5	3.6±0.5	2.9	7.9	5.0


INDUCTANCE AND RATED CURRENT RANGES

CDB0420	0.10μH~3.3μH	22~4A
CDB0520	0.10μH~4.7μH	45~5A
CDB0530	0.10μH~4.7μH	27~8.2A
CDB0620	0.10μH~4.7μH	40~8A
CDB0625	0.10μH~10μH	50~7A
CDB0630	0.10μH~10μH	60~7A

CDB0650	0.56μH~10μH	12~4.5A
CDB1040	0.19μH~10μH	90~12A
CDB1340	0.10μH~10μH	84~14A
CDB1350	0.10μH~10μH	118~16A
CDB1365	0.10μH~10μH	120~15.5A

- Test Equipment:
L: HP4284A LCR meter
DCR: Milli-ohm meter
- Electrical specifications at 25°C
- Operating temperature rang: -20°C~+125°C

PART NUMBERING

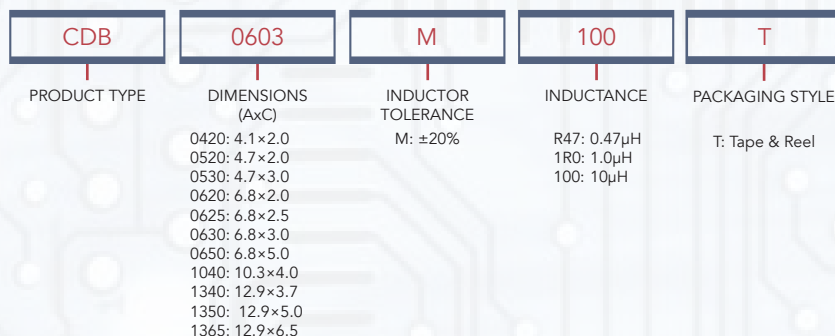

ELECTRICAL CHARACTERISTICS

CDB0420 TYPE

CODES	INDUCTANCE (μH)	TOLERANCE	TEST CONDITION	DCR (mΩ) MAX	SATURATION CURRENT (A) MAX.	TEMPERATURE RISE CURRENT (A) MAX
R10	0.10	M	100KHz, 0.25V	4.0	22.0	12.0
R22	0.22	M	100KHz, 0.25V	6.6	12.5	9.0
R47	0.47	M	100KHz, 0.25V	14	9.5	7.0
R56	0.56	M	100KHz, 0.25V	16	8.5	6.5
1R0	1.0	M	100KHz, 0.25V	27	7.0	4.5
1R5	1.5	M	100KHz, 0.25V	46	6.0	4.0
2R2	2.2	M	100KHz, 0.25V	58	5.0	3.0
3R3	3.3	M	100KHz, 0.25V	87	4.0	2.5

CDB0520 TYPE

CODES	INDUCTANCE (μH)	TOLERANCE	TEST CONDITION	DCR (mΩ) MAX	SATURATION CURRENT (A) MAX.	TEMPERATURE RISE CURRENT (A) MAX
R10	0.10	M	100KHz, 0.25V	3.9	45.0	17.0
R22	0.22	M	100KHz, 0.25V	5.2	22.0	15.0
R33	0.33	M	100KHz, 0.25V	8.2	25.0	12.0
R47	0.47	M	100KHz, 0.25V	9.4	21.0	11.5
R68	0.68	M	100KHz, 0.25V	12.4	15.0	10.0
1R0	1.0	M	100KHz, 0.25V	20.0	16.0	7.0
2R2	2.2	M	100KHz, 0.25V	50.1	12.5	4.2
3R3	3.3	M	100KHz, 0.25V	85.5	8.5	3.3
4R7	4.7	M	100KHz, 0.25V	116.6	5.0	2.8

CDB0530 TYPE

CODES	INDUCTANCE (μH)	TOLERANCE	TEST CONDITION	DCR (mΩ) MAX	SATURATION CURRENT (A) MAX.	TEMPERATURE RISE CURRENT (A) MAX
R10	0.10	M	100KHz, 0.25V	3.16	27.0	23.0
R22	0.22	M	100KHz, 0.25V	4.52	21.0	15.5
R33	0.33	M	100KHz, 0.25V	5.56	19.0	13.7
R47	0.47	M	100KHz, 0.25V	7.04	16.0	12.2
R68	0.68	M	100KHz, 0.25V	8.96	13.5	10.2
R82	0.82	M	100KHz, 0.25V	11.9	13.0	9.3
1R0	1.0	M	100KHz, 0.25V	13.7	12.0	9.2
1R5	1.5	M	100KHz, 0.25V	20.7	11.0	7.2
2R2	2.2	M	100KHz, 0.25V	29.2	10.0	5.8
3R3	3.3	M	100KHz, 0.25V	54.7	8.5	5.0
4R7	4.7	M	100KHz, 0.25V	77.5	8.2	3.5

CDB0620 TYPE

CODES	INDUCTANCE (μH)	TOLERANCE	TEST CONDITION	DCR (mΩ) MAX	SATURATION CURRENT (A) MAX.	TEMPERATURE RISE CURRENT (A) MAX
R10	0.10	M	100KHz, 0.25V	3.5	40.00	18.00
R15	0.15	M	100KHz, 0.25V	5.2	38.00	15.00
R22	0.22	M	100KHz, 0.25V	5.7	26.00	14.00
R33	0.33	M	100KHz, 0.25V	7.0	18.00	12.00
R47	0.47	M	100KHz, 0.25V	9.3	18.00	11.00
R68	0.68	M	100KHz, 0.25V	13.9	17.00	9.00
R82	0.82	M	100KHz, 0.25V	15.9	17.00	8.00
1R0	1.0	M	100KHz, 0.25V	18.3	14.00	7.00
1R5	1.5	M	100KHz, 0.25V	34.0	11.50	4.00
2R2	2.2	M	100KHz, 0.25V	46.0	13.00	3.75
3R3	3.3	M	100KHz, 0.25V	60.1	10.00	3.25
4R7	4.7	M	100KHz, 0.25V	78.0	8.00	3.00



ELECTRICAL CHARACTERISTICS

CDB0625 TYPE

CODES	INDUCTANCE (μH)	TOLERANCE	TEST CONDITION	DCR (mΩ) MAX	SATURATION CURRENT (A) MAX.	TEMPERATURE RISE CURRENT (A) MAX
R10	0.10	M	100KHz, 0.25V	1.7	50.0	30.0
R22	0.22	M	100KHz, 0.25V	3.2	34.0	21.0
R33	0.33	M	100KHz, 0.25V	4.1	22.0	18.0
R47	0.47	M	100KHz, 0.25V	6.5	21.0	13.5
R68	0.68	M	100KHz, 0.25V	9.4	18.0	11.0
R82	0.82	M	100KHz, 0.25V	11.8	17.0	10.0
1R0	1.0	M	100KHz, 0.25V	14.2	16.0	9.0
1R5	1.5	M	100KHz, 0.25V	21.2	15.0	7.5
2R2	2.2	M	100KHz, 0.25V	34.0	14.0	6.5
3R3	3.3	M	100KHz, 0.25V	51.6	13.0	5.0
4R7	4.7	M	100KHz, 0.25V	63.0	10.0	4.5
6R8	6.8	M	100KHz, 0.25V	95.0	9.0	3.5
8R2	8.2	M	100KHz, 0.25V	106.0	8.0	3.0
100	10	M	100KHz, 0.25V	129.0	7.0	2.5

CDB0630 TYPE

CODES	INDUCTANCE (μH)	TOLERANCE	TEST CONDITION	DCR (mΩ) MAX	SATURATION CURRENT (A) MAX.	TEMPERATURE RISE CURRENT (A) MAX
R10	0.10	M	100KHz, 0.25V	1.7	60.0	32.5
R22	0.22	M	100KHz, 0.25V	2.8	40.0	23.0
R33	0.33	M	100KHz, 0.25V	3.9	30.0	20.0
R47	0.47	M	100KHz, 0.25V	4.2	26.0	17.5
R68	0.68	M	100KHz, 0.25V	5.5	25.0	15.5
R82	0.82	M	100KHz, 0.25V	8.0	24.0	13.0
1R0	1.0	M	100KHz, 0.25V	10.0	22.0	11.0
1R5	1.5	M	100KHz, 0.25V	15.0	18.0	9.0
2R2	2.2	M	100KHz, 0.25V	20.0	14.0	8.0
3R3	3.3	M	100KHz, 0.25V	30.0	13.5	6.0
4R7	4.7	M	100KHz, 0.25V	40.0	10.0	5.5
6R8	6.8	M	100KHz, 0.25V	60.0	8.0	4.5
8R2	8.2	M	100KHz, 0.25V	68.0	7.5	4.0
100	10	M	100KHz, 0.25V	105.0	7.0	3.0

CDB0650 TYPE

CODES	INDUCTANCE (μH)	TOLERANCE	TEST CONDITION	DCR (mΩ) MAX	SATURATION CURRENT (A) MAX.	TEMPERATURE RISE CURRENT (A) MAX
R56	0.56	M	100KHz, 0.25V	3.6	12.0	20.0
R68	0.68	M	100KHz, 0.25V	4.5	11.5	18.0
R82	0.82	M	100KHz, 0.25V	4.9	13.0	16.5
1R0	1.0	M	100KHz, 0.25V	6.5	15.0	13.0
1R5	1.5	M	100KHz, 0.25V	9.0	12.0	12.0
2R2	2.2	M	100KHz, 0.25V	13.6	10.0	10.0
3R3	3.3	M	100KHz, 0.25V	20.9	8.0	8.0
4R7	4.7	M	100KHz, 0.25V	30.3	7.0	6.5
5R6	5.6	M	100KHz, 0.25V	34.4	7.0	6.0
6R8	6.8	M	100KHz, 0.25V	44.6	5.5	5.5
8R2	8.2	M	100KHz, 0.25V	50.7	5.0	5.0
100	10	M	100KHz, 0.25V	71.3	4.5	4.5

ELECTRICAL CHARACTERISTICS

CDB1040 TYPE

CODES	INDUCTANCE (μH)	TOLERANCE	TEST CONDITION	DCR (mΩ) MAX	SATURATION CURRENT (A) MAX.	TEMPERATURE RISE CURRENT (A) MAX
R19	0.19	M	100KHz, 0.25V	0.95	90.0	40.0
R36	0.36	M	100KHz, 0.25V	1.40	60.0	31.5
R47	0.47	M	100KHz, 0.25V	1.60	38.0	26.0
R56	0.56	M	100KHz, 0.25V	1.80	49.0	27.5
1R0	1.0	M	100KHz, 0.25V	4.10	36.0	17.5
1R5	1.5	M	100KHz, 0.25V	5.80	27.5	15.0
2R2	2.2	M	100KHz, 0.25V	9.00	25.6	12.0
3R3	3.3	M	100KHz, 0.25V	11.80	18.6	10.0
4R7	4.7	M	100KHz, 0.25V	16.50	17.0	9.5
5R6	5.6	M	100KHz, 0.25V	19.30	16.0	8.5
6R8	6.8	M	100KHz, 0.25V	23.30	13.5	8.0
100	10	M	100KHz, 0.25V	36.50	12.0	6.8

CDB1340 TYPE

CODES	INDUCTANCE (μH)	TOLERANCE	TEST CONDITION	DCR (mΩ) MAX	SATURATION CURRENT (A) MAX.	TEMPERATURE RISE CURRENT (A) MAX
R10	0.10	M	100KHz, 0.25V	0.96	84.0	43.0
R15	0.15	M	100KHz, 0.25V	1.20	75.0	41.0
R22	0.22	M	100KHz, 0.25V	1.30	65.0	38.5
R33	0.33	M	100KHz, 0.25V	1.50	62.0	36.5
R47	0.47	M	100KHz, 0.25V	2.00	55.0	32.0
R60	0.60	M	100KHz, 0.25V	2.20	51.0	29.0
R68	0.68	M	100KHz, 0.25V	2.50	49.0	28.0
R82	0.82	M	100KHz, 0.25V	3.00	44.0	25.0
1R0	1.0	M	100KHz, 0.25V	3.50	40.0	24.0
1R5	1.5	M	100KHz, 0.25V	5.50	35.0	19.0
1R8	1.8	M	100KHz, 0.25V	7.00	30.0	16.5
2R2	2.2	M	100KHz, 0.25V	8.00	29.0	16.0
3R3	3.3	M	100KHz, 0.25V	12.00	27.0	12.0
4R7	4.7	M	100KHz, 0.25V	15.00	24.0	10.0
5R6	5.6	M	100KHz, 0.25V	19.00	19.0	9.5
6R8	6.8	M	100KHz, 0.25V	22.00	18.0	9.0
8R2	8.2	M	100KHz, 0.25V	28.00	16.0	8.5
100	10	M	100KHz, 0.25V	34.00	14.0	7.0

CDB1350 TYPE

CODES	INDUCTANCE (μH)	TOLERANCE	TEST CONDITION	DCR (mΩ) MAX	SATURATION CURRENT (A) MAX.	TEMPERATURE RISE CURRENT (A) MAX
R10	0.10	M	100KHz, 0.25V	6.0	118.0	55.0
R22	0.22	M	100KHz, 0.25V	0.8	110.0	51.0
R33	0.33	M	100KHz, 0.25V	1.1	80.0	42.0
R47	0.47	M	100KHz, 0.25V	1.3	65.0	38.0
R56	0.56	M	100KHz, 0.25V	1.5	55.0	36.0
R68	0.68	M	100KHz, 0.25V	1.7	54.0	34.0
R82	0.82	M	100KHz, 0.25V	2.3	53.0	31.0
1R0	1.0	M	100KHz, 0.25V	2.5	50.0	29.0
1R5	1.5	M	100KHz, 0.25V	4.1	48.0	23.0
1R8	1.8	M	100KHz, 0.25V	4.9	40.0	19.0
2R2	2.2	M	100KHz, 0.25V	5.5	32.0	20.0
3R3	3.3	M	100KHz, 0.25V	9.2	32.0	15.0
4R7	4.7	M	100KHz, 0.25V	15.0	27.0	12.0
5R6	5.6	M	100KHz, 0.25V	16.5	22.0	11.5
6R8	6.8	M	100KHz, 0.25V	18.5	21.0	11.0
7R8	7.8	M	100KHz, 0.25V	20.5	18.0	10.0
8R2	8.2	M	100KHz, 0.25V	22.5	18.0	9.5
100	10	M	100KHz, 0.25V	25.5	16.0	9.0



ELECTRICAL CHARACTERISTICS

CDB1350 TYPE

CODES	INDUCTANCE (μH)	TOLERANCE	TEST CONDITION	DCR (mΩ) MAX	SATURATION CURRENT (A) MAX.	TEMPERATURE RISE CURRENT (A) MAX
R10	0.10	M	100KHz, 0.25V	0.5	120.0	60.0
R15	0.15	M	100KHz, 0.25V	0.6	118.0	55.0
R22	0.22	M	100KHz, 0.25V	0.7	112.0	53.0
R30	0.30	M	100KHz, 0.25V	0.8	72.0	48.0
R33	0.33	M	100KHz, 0.25V	0.9	65.0	46.0
R40	0.40	M	100KHz, 0.25V	1.0	64.0	44.0
R47	0.47	M	100KHz, 0.25V	1.2	63.0	41.0
R56	0.56	M	100KHz, 0.25V	1.4	62.0	37.0
R68	0.68	M	100KHz, 0.25V	1.6	60.0	35.0
R82	0.82	M	100KHz, 0.25V	1.9	50.0	33.0
1R0	1.0	M	100KHz, 0.25V	2.0	49.0	32.0
1R2	1.2	M	100KHz, 0.25V	2.5	48.0	30.0
1R5	1.5	M	100KHz, 0.25V	3.0	45.0	27.0
1R8	1.8	M	100KHz, 0.25V	3.2	41.0	24.0
2R2	2.2	M	100KHz, 0.25V	4.2	40.0	22.0
3R3	3.3	M	100KHz, 0.25V	6.8	35.0	18.0
4R7	4.7	M	100KHz, 0.25V	8.7	32.0	13.5
5R6	5.6	M	100KHz, 0.25V	10.0	32.0	13.5
6R8	6.8	M	100KHz, 0.25V	14.0	16.5	11.5
8R2	8.2	M	100KHz, 0.25V	15.5	16.0	10.5
100	10	M	100KHz, 0.25V	17.2	15.5	10.0

GENERAL CHARACTERISTICS

ITEM	REQUIREMENT	TEST METHODS															
SOLDERABILITY	- More than 90% of the terminal electrode should be covered with solder	- 230±5°C for 4±1 seconds															
SOLDER HEAT RESISTANCE		- 260±5°C for 10±1 seconds															
HEAT RESISTANCE		- Temperature: 125±5°C - Time: 500 hours - Tested after 2 hour at room temperature															
COLD RESISTANCE	- Inductance within±20% of initial value	- Temperature: -40±5°C - Time: 500 hours - Tested after 2 hour at room temperature															
THERMAL SHOCK	- No disconnection or short circuit - The appearance shall not break	-One cycle: <table border="1"> <thead> <tr> <th>STEP</th> <th>TEMPERATURE (°C)</th> <th>TIME (MIN.)</th> </tr> </thead> <tbody> <tr><td>1</td><td>-40±5°C</td><td>30</td></tr> <tr><td>2</td><td>Room Temperature</td><td>3</td></tr> <tr><td>3</td><td>125±5°C</td><td>30</td></tr> <tr><td>4</td><td>Room Temperature</td><td>3</td></tr> </tbody> </table>	STEP	TEMPERATURE (°C)	TIME (MIN.)	1	-40±5°C	30	2	Room Temperature	3	3	125±5°C	30	4	Room Temperature	3
STEP	TEMPERATURE (°C)	TIME (MIN.)															
1	-40±5°C	30															
2	Room Temperature	3															
3	125±5°C	30															
4	Room Temperature	3															
HUMIDITY RESISTANCE		- Temperature: 40±2°C, 90~95% relative humidity - Time: 500 hours - Tested after 2 hour at room temperature															
VIBRATION TEST	- Inductance within±5% of initial value - The appearance shall not break	- After vibration for 1hour, in each of three orientations at sweep vibration (10~55~10Hz) with 1.52mm P-P amplitudes															